


Socket - Weld Well

6600 Series

- Standard Bore Size: .260 or .385
- Used In Seal Welded Applications For Maximum Vessel Integrity
- Brass Plug and Chain Optional

Extensive Inventory

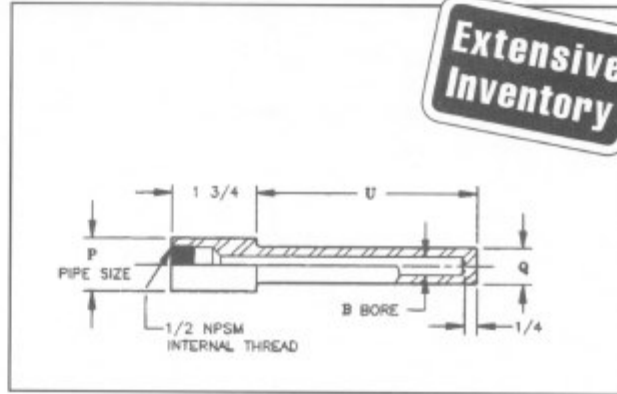

Process (P) Connection	B	Q
3/4"	.260	3/4"
	.385	49/64"
1"	.260	7/8"
	.385	7/8"

6600

<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Material</th> </tr> </thead> <tbody> <tr><td>S</td><td>Carbon Steel (C1018)</td></tr> <tr><td>C</td><td>304 Stainless Steel</td></tr> <tr><td>H</td><td>316 Stainless Steel</td></tr> <tr><td>D</td><td>446 Stainless Steel</td></tr> <tr><td>M</td><td>Monel 600</td></tr> <tr><td>A</td><td>Inconel 600</td></tr> <tr><td colspan="2">Consult factory for other materials</td></tr> </tbody> </table>	Code	Material	S	Carbon Steel (C1018)	C	304 Stainless Steel	H	316 Stainless Steel	D	446 Stainless Steel	M	Monel 600	A	Inconel 600	Consult factory for other materials		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Other Pertinent Data</th> </tr> </thead> <tbody> <tr><td>0</td><td>None</td></tr> <tr><td>999</td><td>Special request consult factory</td></tr> </tbody> </table>	Code	Other Pertinent Data	0	None	999	Special request consult factory		
Code	Material																								
S	Carbon Steel (C1018)																								
C	304 Stainless Steel																								
H	316 Stainless Steel																								
D	446 Stainless Steel																								
M	Monel 600																								
A	Inconel 600																								
Consult factory for other materials																									
Code	Other Pertinent Data																								
0	None																								
999	Special request consult factory																								
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Bore Diameter "B"</th> </tr> </thead> <tbody> <tr><td>.260</td><td>.260</td></tr> <tr><td>.385</td><td>.385</td></tr> </tbody> </table>	Code	Bore Diameter "B"	.260	.260	.385	.385	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Plug and Chain</th> </tr> </thead> <tbody> <tr><td>0</td><td>None</td></tr> <tr><td>1</td><td>Brass</td></tr> <tr><td>2</td><td>Stainless Steel</td></tr> </tbody> </table>	Code	Plug and Chain	0	None	1	Brass	2	Stainless Steel										
Code	Bore Diameter "B"																								
.260	.260																								
.385	.385																								
Code	Plug and Chain																								
0	None																								
1	Brass																								
2	Stainless Steel																								
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Pipe Size</th> </tr> </thead> <tbody> <tr><td>3/4</td><td>3/4" Pipe (1.050 Nom. O.D.)</td></tr> <tr><td>1</td><td>1" Pipe (1.315 Nom. O.D.)</td></tr> </tbody> </table>	Code	Pipe Size	3/4	3/4" Pipe (1.050 Nom. O.D.)	1	1" Pipe (1.315 Nom. O.D.)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>Thermowell Insertion Length "U"</th> </tr> </thead> <tbody> <tr><td>2.5</td><td>2 1/2"</td></tr> <tr><td>4.5</td><td>4 1/2"</td></tr> <tr><td>7.5</td><td>7 1/2"</td></tr> <tr><td>10.5</td><td>10 1/2"</td></tr> <tr><td>13.5</td><td>13 1/2"</td></tr> <tr><td>16.5</td><td>16 1/2"</td></tr> <tr><td>22.5</td><td>22 1/2"</td></tr> <tr><td colspan="2">For other length consult factory</td></tr> </tbody> </table>	Code	Thermowell Insertion Length "U"	2.5	2 1/2"	4.5	4 1/2"	7.5	7 1/2"	10.5	10 1/2"	13.5	13 1/2"	16.5	16 1/2"	22.5	22 1/2"	For other length consult factory	
Code	Pipe Size																								
3/4	3/4" Pipe (1.050 Nom. O.D.)																								
1	1" Pipe (1.315 Nom. O.D.)																								
Code	Thermowell Insertion Length "U"																								
2.5	2 1/2"																								
4.5	4 1/2"																								
7.5	7 1/2"																								
10.5	10 1/2"																								
13.5	13 1/2"																								
16.5	16 1/2"																								
22.5	22 1/2"																								
For other length consult factory																									

6600-C-.260-3/4-7-0-0

Ordering Example